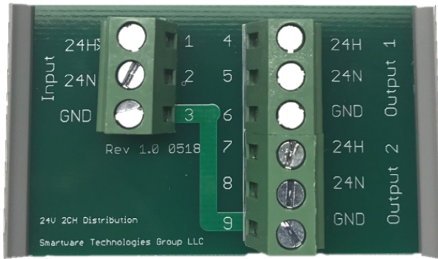


**STG-24V-2CH**

**BENEFITS & FEATURES:**

- Allows for distribution of power connections.

**STG-120V-2CH**

**STG-24V-5CH**

**Power Distribution Boards:**

The Power Distribution Boards are available in three varieties: 24V-2CH, 120V-2CH, and 24V-5CH. The boards allow distribution of a single power connection, plus ground, out to 2 channels (24V-2CH, 120V-2CH) or 5 channels (24V-5CH). The power distribution boards can be used for a variety of product lines, including Schneider Electric's EcoStruxure products.

**SPECIFICATIONS:**
**Operating Temperature:**

+32 to +122 Degrees F

**WIRING:**

24 Volt 2 Channel Distribution Board

Input		Output	
24H	1 4	24H	
24N	2 5	24N	
GND	3 6	GND	
	7	24H	
	8	24N	
	9	GND	

STG-24V-2CH

24 Volt 5 Channel Distribution Board

Input		Output	
24H	1 4	24H	
24N	2 5	24N	
GND	3 6	GND	
	7	24H	
	8	24N	
	9	GND	
	10	24H	
	11	24N	
	12	GND	
	13	24H	
	14	24N	
	15	GND	
	16	24H	
	17	24N	
	18	GND	

STG-24V-5CH

120 Volt 2 Channel Distribution Board

Input		Output	
120H	1 4	120H	
120N	2 5	120N	
GND	3 6	GND	
	7	120H	
	8	120N	
	9	GND	

STG-120V-2CH