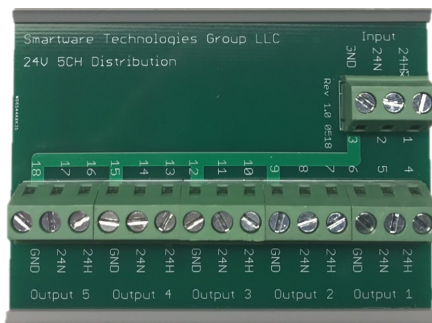


STG-24V-2CH

STG-24V-5CH

BENEFITS & FEATURES:

- Allows for distribution of 24V power connections.

Power Distribution Boards:

The 24V Power Distribution Boards are available in two varieties 24V-2CH and 24V-5CH. The boards allow distribution of a single power connection, plus ground, out to 2 channels (24V-2CH) or 5 channels (24V-5CH). The power distribution boards can be used for a variety of product lines, including Schneider Electric's EcoStruxure products.

SPECIFICATIONS:
Operating Temperature:

+32 to +122 Degrees F

WIRING:

24 Volt 2 Channel Distribution Board

Input		Output	
24H	1	4	24H
24N	2	5	24N
GND	3	6	GND
		7	24H
		8	24N
		9	GND

STG-24V-2CH

24 Volt 5 Channel Distribution Board

Input		Output	
24H	1	4	24H
24N	2	5	24N
GND	3	6	GND
		7	24H
		8	24N
		9	GND
		10	24H
		11	24N
		12	GND
		13	24H
		14	24N
		15	GND
		16	24H
		17	24N
		18	GND

STG-24V-5CH